

PLI INSULATED PALLETISED CONTAINER

The PLI palletised container has been designed for the movement of all those liquids (foodstuffs in particular) which must keep their filling temperatures for about 24 hours.


TECHNICAL PARTICULARS AND STANDARD COMPONENTS

- Inner and outer tank in AISI 304 or 316 cold rolled stainless steel
- Moulded bases
- PU foam heat insulation
- DN 400 manhole with rapid lever of screw closing
- 1"½ - 2" - 2"½ unloading nozzle
- Modular galvanized cage

OPTIONAL ACCESSORIES**

- Ball or butterfly valve
- Double-acting safety valve
- Stirrers
- Electric heating

**The complete range of accessories is shown in the appropriate leaflet.

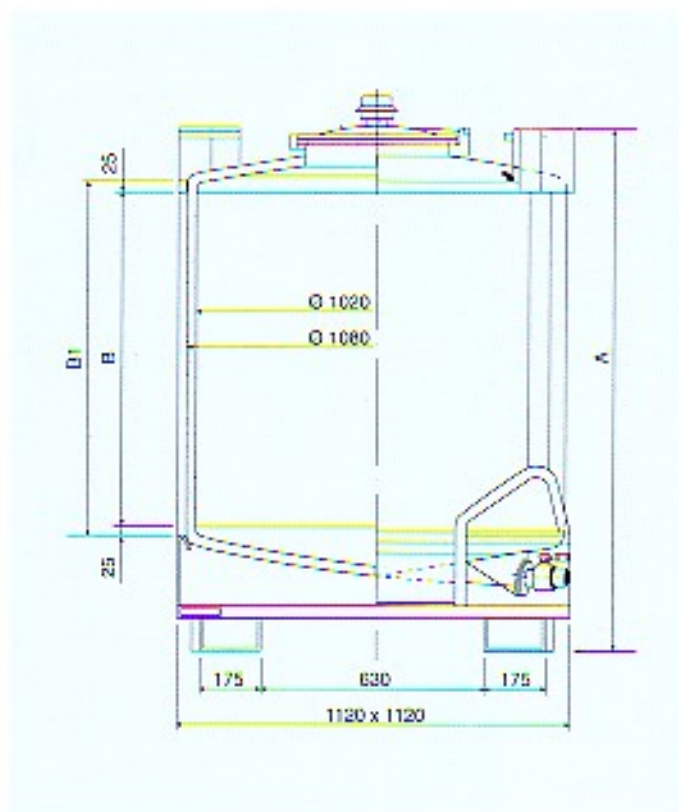

	PLI 650	PLI 850	PLI 1000
A	1250	1500	1750
B	750	1000	1250
CAPACITY LT.	670	875	1050
WEIGHT Kg*	175	200	220

* Weights are indicative.

The information contained in this leaflet is subject to change, without notice, at the discretion of the manufacturer.

