

# PLVO APPROVED PALLETISED CONTAINER FOR HIGH DENSITY LIQUIDS


The approved palletised container conforms to the regulations as laid down in section 16 UN-APP. A.6/VI ADR/RID and DM 14/05/90 Merchant Navy Ministry, for the transportation of dangerous liquids with a density not exceeding 1.9 Kg/l, packing groups II and III having a vapour pressure not exceeding 110 kPa at 50°C.

## TECHNICAL PARTICULARS AND STANDARD COMPONENTS

- 304 or 316 cold-rolled stainless steel tank
- Moulded bases
- DN 400 manhole with rapid lever or screw closing
- 2" to 4" stainless steel unloading ball valve
- 2" to 4" stainless steel butterfly valve
- 0,65 Bar calibrated overpressure valve
- 2" upper nozzle with plug
- Modular galvanised cage

## OPTIONAL ACCESSORIES

- 1/2" to 3" upper nozzle
- Vacuum breaker valve
- Moving part leading device (if required)
- Heating jacket

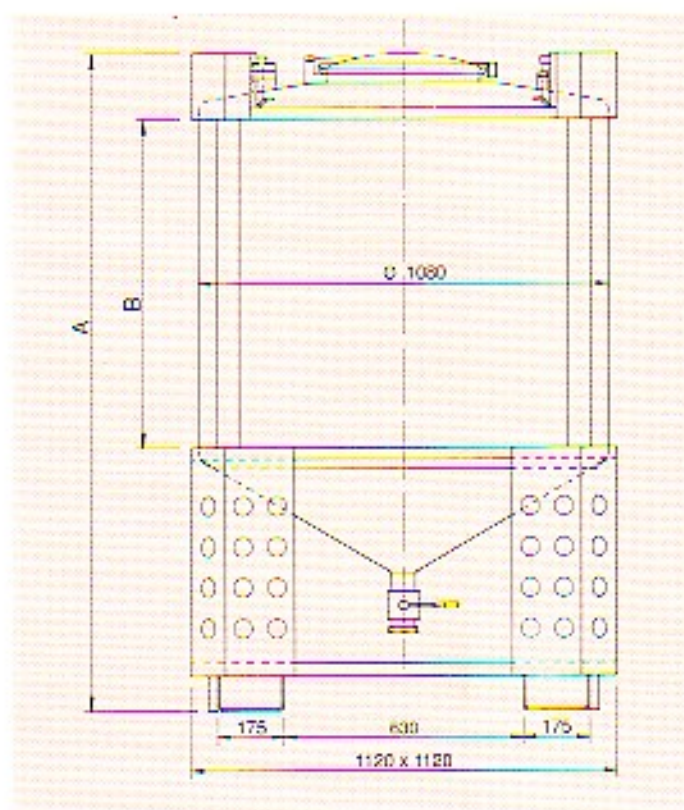

	PLVO 750	PLVO 995	PLVO 1150
A	1470	1720	1910
B	660	910	1100
CAPACITY LT.	765	995	1165
WEIGHT kg*	160	170	200

\* Weights are indicative.

The information contained in this leaflet is subject to change, without notice, at the discretion of the manufacturer.

