

PLI/R INSULATED PALLETISED CONTAINER WITH HEATING OR COOLING JACKET

The PLI/R container has been designed for the transportation of all those liquids (food products, in particular) which have to be heated or cooled during the period of preservation or before use. The process involved permits the flow of hot or cold liquids in the jacket.


TECHNICAL PARTICULARS AND STANDARD COMPONENTS

- Inner and outer tank in AISI 304 or 316 cold-rolled stainless steel
- Moulded bases
- Special jacket for cooling or heating liquid flow
- PU foam heat insulation
- DN 400 manhole with rapid lever or screw closing
- 1 1/2" - 2" - 2 1/2" unloading nozzle
- Modular galvanized cage

OPTIONAL ACCESSORIES**

- Ball or butterfly valve
- Double-acting safety valve
- Stirrers

**The complete range of accessories is shown in the appropriate leaflet.

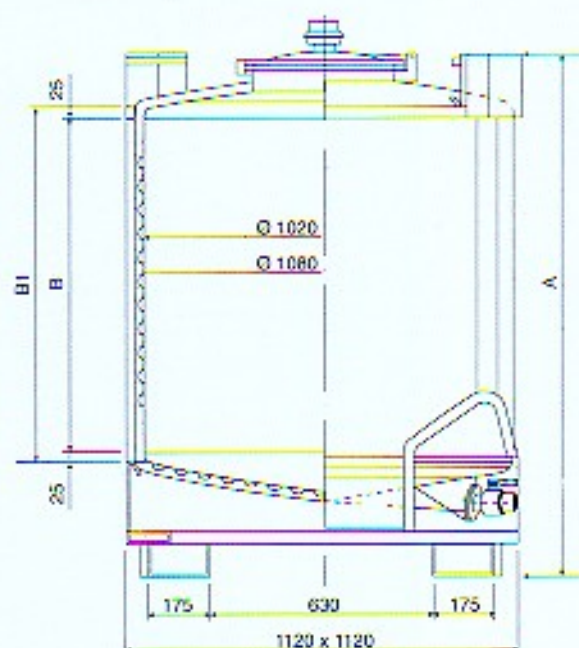

	PLI/R 650	PLI/R 850	PLI/R 1000
A	1250	1500	1750
B	750	1000	1250
CAPACITY LT.	670	875	1050
WEIGHT Kg*	195	225	255

* Weights are indicative

The information contained in this leaflet is subject to change, without notice, at the discretion of the manufacturer.

